

8M HD Analog IR Turret


CVD1-28-RS

Features

- Analog High Definition Universal over Coax Technology
- Starlight Super Low Light Technology
- 1/1.8" CMOS Sensor
- Max 2160P Resolution at 15/12.5fps
- Wide Dynamic Range (WDR)
- Smart IR™ with Intelligent Camera Sync. 70ft Range
- Smart DNR™ 3D Digital Noise Reduction
- Highlight Masking Exposure (HME)
- True Day/Night Mechanical IR Cut Filter
- Programmable Privacy Zones
- Auto Gain Control (AGC)
- Back Light Compensation (BLC)
- Dynamic Range Compressor (DRC) Reveals Low Light Detail
- Auto White Balance (AWB)
- IP67 Certified (Weather Resistant)
- OSD Control via Coax Cable using UTC



Dimension (mm)

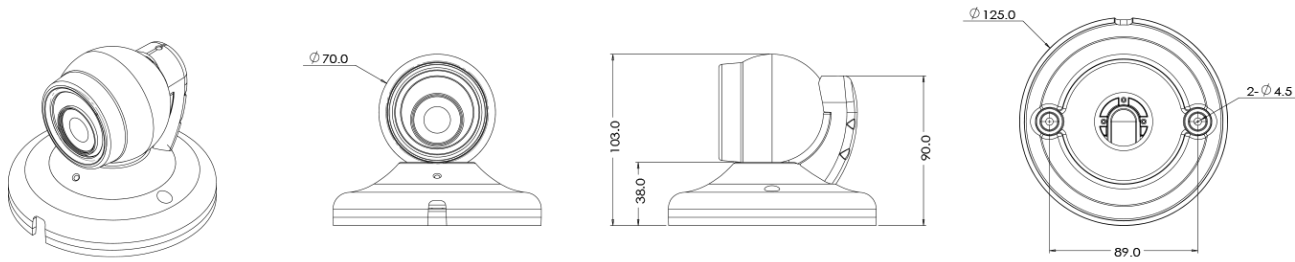

Specification

비디오	
이미지 센서	1/1.8" 8M CMOS
채널 수	1
총 화소	3952(H) x 2320(V)
화소	3864(H) x 2176(V)
최대 해상도	3840(H) x 2160(V)
최저저도	Color(at Day) : 0.1Lux (F1.6, 30IRE) B/W(at Night) : 0 lux(With IR)
영상 출력	AHD or TVI or CVI or CVBS
설치자용 비디오 출력 (2nd Video Out)	No
신호 기술	Max 8.0 Megapixel Universal
동기화	Internal
주사 방식	Progressive Scan

렌즈	
초점 거리	2.8mm 4.0mm 6.0mm
조리개	F1.6
렌즈 타입	Fixed
IRIS 제어	Auto Exposure
화각	2.8mm D:120.5 , H:106.5 , V:59.1 4.0mm D:98.8 , H:85.7 , V:47.5 6.0mm D:63.5 , H:54.6 , V:30.1

카메라 기능	
전자식 셔터 속도	1/30(25) - 1/30,000 Slow Shutter (OFF-x32)
자동 이득 조절	Yes
주간 야간 모드	TDN (True Day & Night)
노이즈 제거	2D/3D DNR
와이드 다이내믹 레인지	LINE WDR
다이내믹 레인지	120dB or above
IR LED	H2IR
IR 거리	70ft
감마	0.5
기타 기능	Motion Detection Privacy Zone White Balance Backlight Mirror & Flip

입출력 & 이벤트	
오디오 입출력	No
알람 입출력	No

입출력 & 이벤트	
UTC 내장	UTC
UTP 내장	No
전원	
전원	DC12V Voltage DC12V
소비 전력	3W (250mA) 4.54W (378mA)
동작 환경	
동작 온도	-20°C ~ 50°C
콜드 스타트	No
동작 습도	Less than 90%(Non-Condensing)
충격 대응	IK10
방진 방수 대응	IP67
인증	FCC CE ROHS
외관	
하우징 모델명	VD1
케이스 타입	Outdoor Dome
재질	Aluminum-Die Casting
색상	White
크기 (W X D X H)	125mm 103mm
무게	0.53

Compatible Accessories

 BCA3 NP(K) Ceiling Bracket	 GP02 Gang Bracket	 BJC03 Junction Bracket	 BW10 Wall Bracket
---	--	--	--