

2M IP IR Flat Dome


NVD13-62-R

Features

- Weather Proof Design
- Water Proof Cable
- Optimized Multiple Profile Streaming
- ROI(Region of Interest)
- Advanced Built in ISP
- Fluid Integration Way
- Double Scan Sensor with Advanced Built in ISP (2M)
- Two motor MFZ(Motorized Focus Controllable) / P-Iris lens



Dimension (mm)

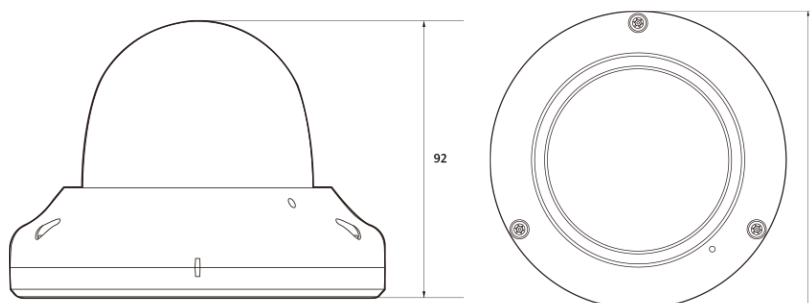

Specification

Video	
Image Sensor	1/2.8" 2.1M CMOS
Channels	1
Total Pixel	1945(H) X 1109(V)
Max Resolution	1920 X 1080
MIN. Illumination	0.02Lux 0Lux with IR (F1.4)
Only installer Video Output	1 [CVBS 1.0V p-p (75Ω)]
S/N(signal/noise) Ratio	50dB
Scanning Mode	Progressive Scan

Lens	
Focal Length	2.7~13.5mm
Aperture	F1.4
Lens Type	Motorized
IRIS Type	P-IRIS
Horizontal Angle	D:39.1 ~124.3 , H:34.1 ~107.9 , V:19.1 ~57.0
Pan / Tilt / Zoom	Zoom :X5 Optical

Operational	
Shutter Speed	Auto / Manual (1/15 ~ 1/32000) Anti-Flicker Slow Shutter(1/2,1/3,1/5,1/6,1/7.5, 1/10)
Auto Gain Control (AGC)	Yes
Day & Night	TDN (True Day & Night)
Digital Noise Reduction	3D DNR
Wide Dynamic Range (WDR)	WDR (2x)
Dynamic Range	120dB or above
IR LEDs	H2IR
IR Distance	70ft
Privacy Zone	Yes
Function	Motion Detection Mirror & Flip

Intelligent Video Analytic	
AI Intelligent Video Analytic	No

Encoder (video & audio)	
Video Compression	H.265 H.264 MJPEG

Encoder (video & audio)

Support Resolution	H.265 : 1920x1080/1280x720/704x576/704x480/640x480/352x288/352x240 H.264 : 1920x1080/1280x720/704x576/704x480/640x480/352x288/352x240 MJPEG : 1920x1080/1280x720/800x600/640x480/768x432/704x576/704x480/352x288/352x240
Intelligent Codec	Yes
Multiple Profile Streaming Performance	1080p30 + D1(704x480 or 704x576) p30 with H.264, H.265 + MJPEG
Video BitRate	Yes
Bitrate Control	Multi Streaming CBR/VBR at H.265 (Controllable frame rate and Bandwidth)
Video Bitrate extra comment	Multi-rate for Preview and Recording
Audio Compression	G.711
Special Feature	Smart AVC (Automatic Voltage Control) Dynamic ROI(Region of Interest)

I/O & Event

Audio In / Out	1(Mic)/1
Alarm In / Out	1/1
Event Trigger	Motion Alarm Network Disconnection Temperature Critical Illegal Login Schedule Sensor Detection
Event Notification	FTP E-Mail Alarm Out SD Card

Network

Ethernet	RJ45 (10/100Base-T)
Protocol	TCP/IP, UDP, Auto IP, RTP(UDP/TCP), RTSP, NTP, HTTP, HTTPS, SSL, DNS, DDNS, DHCP, FTP, SMTP, ICMP, SNMPv1/v2/v3(MIB-2), ONVIF
Security	HTTPS(SSL), IP Filtering, 802.1x, Digest Authentication
SIP/VoIP Support	No
Application Programming I/F	CGI API ONVIF
Web viewer	Windows® Internet Explorer® Google Chrome®
Video management software (VMS)	DW Spectrum® IPVMS
Support languages	English Korean
Edge storage	Micro SD Micro SDHC Micro SDXC
SD Card Socket	1

Electrical

Power Requirement	DC12V PoE IEEE 802.3af Class3
Power consumption	DC12V Max 6.2WPoE Max 8.2W

Environmental

Environmental	
Operating Temperature	-20°C ~ 50°C
Cold Start	No
Vandal Proof Casing	IK10
IP Rating	IP67
Other Certification	FCC CE ROHS

Mechanical	
Housing Model	VD13
Housing	Outdoor Dome
Material	Aluminum-Die Casting
Color	White
Dimensions (W x D x H)	125mm 92mm
Weight	0.52kg

Compatible Accessories

 BCA3 NP(K) Ceiling Bracket	 GP02 Gang Bracket	 BJC03 Junction Bracket	 BW10 Wall Bracket
---	--	--	--